

MENU ITEMS


(Shows only the groups and the next level items)

DUP/TONE... group	DV Set group	Display group
Offset Freq Repeater Tone TSQL Freq Tone Burst DTCS Code DTCS Polarity Digital Code	Tone Control Auto Reply DV Data TX DV Fast Data Digital Monitor Digital Repeater Set DV Auto Detect RX Record (RPT) BK EMR EMR AF Level	Backlight Backlight Night Time Setting Auto Dimmer Setting LCD Contrast RX Call Sign RX Position Indicator RX Position Display RX Position Display Timer Reply Position Display TX Call Sign Scroll Speed Opening Message Voltage (Power ON) Clock/Voltage Display Display Unit System Language
Manage Memory group	SPEECH group	Sounds group
Memory CH Call CH	RX Call Sign SPEECH RX>CS SPEECH DIAL SPEECH MODE SPEECH SPEECH Language Alphabet SPEECH Speed SPEECH Level	Beep Level Key-Touch Beep Home CH Beep Band Edge Beep Scan Stop Beep Standby Beep Sub Band Mute (Main RX) Sub Band Mute (TX) Scope AF Output
Scan group	DTMF group	Time Set group
Pause Timer Resume Timer Temporary Skip Timer Program Skip Bank Link Program Scan Edge Program Link	DTMF Memory DTMF Speed	Date/Time GPS Time Correct UTC Offset Auto Power OFF
Voice Memo group	QSO/RX Log group	SD Card group
QSO Recorder DV Auto Reply	QSO Log RX History Log CSV Format	Load Setting Save Setting Save Form Import/Export SD Card Info Format Unmount
Voice TX group	Function group	Bluetooth Set group
Record TX Set <<TX>>	Squelch/ATT Select Squelch Delay Fan Control Dial Speed-UP Auto Repeater* Remote MIC Key Up/Down MIC Key One-Touch PTT (Remote MIC) PTT Lock Busy Lockout Time-Out Timer Active Band MIC Gain Touch Operation (Sub) Keyboard Type Data Speed CI-V Heterodyne Power OFF (With No Controller)	Bluetooth Auto Connect Pairing/Connect <<Pairing Reception>> Headset set Data Device set Bluetooth Device Information Initialize Bluetooth Device
GPS group	Others group	Information Clone Repeater Mode* Touch Screen Calibration Reset
GPS Set GPS TX Mode GPS Information GPS Position GPS Memory GPS Alarm GPS Logger GPS Auto TX		
Call Sign group		
—		
RX History group		
—		
DV Memory group		
Your Call Sign Repeater List		
My Station group		
My Call Sign TX Message		

ICOM

ID-5100A/ID-5100E

Operating Guide

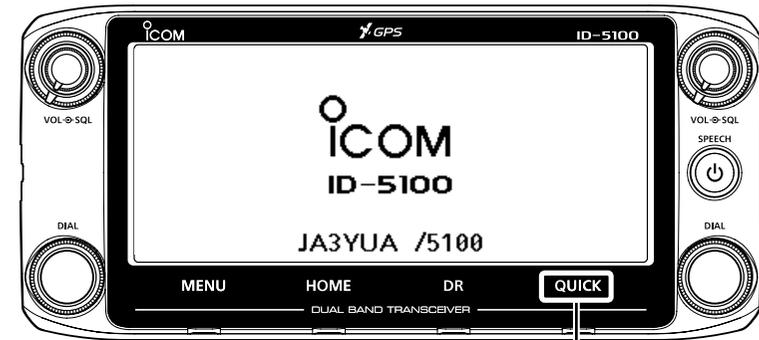

Touch to display the Quick Menu.

QUICK MENU ITEMS

In the Quick Menu, the selectable items differ, depending on the operating mode or function. The items shown below are examples.

VFO mode	MR mode	CALL-CH mode	DR function
Band Select	Bank Select	GPS Information	Group Select
GPS Information	GPS Information	GPS Position	Repeater Detail
GPS Position	GPS Position	Weather Information†	GPS Information
Weather Information†	Weather Information†	PRIO Watch	GPS Position
Temporary Skip‡	Temporary Skip‡	Weather CH*	Weather Information†
PRIO Watch	PRIO Watch	Weather Alert*	Temporary Skip‡
Weather CH*	Weather CH*	Display Type	PRIO Watch
Weather Alert*	Weather Alert*	Voltage	Weather CH*
Home CH Set	Home CH Set	<<REC Start>>	Weather Alert*
Voltage	Display Type	<<Lock>>	Home CH Set
<<REC Start>>	Voltage		Display Type
<<Lock>>	<<REC Start>>		Voltage
	<<Lock>>		<<REC Start>>
			<<Lock>>

†Appears when the D-PRS TX format is set to "Weather."

‡Appears while scanning.

*Appears for only the USA version transceivers

A-7115H-1EX-③

Printed in Japan © 2014-2015 Icom Inc.

*Appears depending on the transceiver's version.

TOUCH SCREEN OPERATIONS

About the Touch area

Areas you can touch for various operations are shown with a “□” border.

- This page describes the main operations of the touch screen. See the instruction manual for other operations.

Touch operation

S (Short touch): If the display is touched briefly, one short beep sounds.

L (Long touch): If the display is touched for 1 second, one short and one long beep sound.


- After the beep, the operation is enabled.

Dual or Single band display selection: L


- MAIN band: Used for TX or radio's settings
- SUB band: Used for the Dualwatch operation

“MHz” tuning selection: L

Operating band selection: S

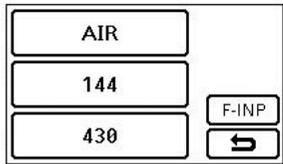



TX power selection: S

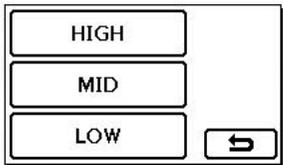

Function menu selection: S


Displays the Function menu list: L

In the DR screen
(Operating Mode: DV)

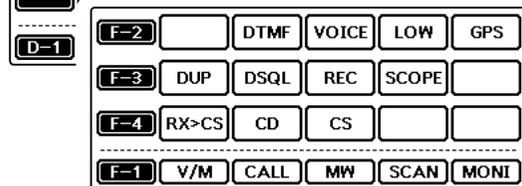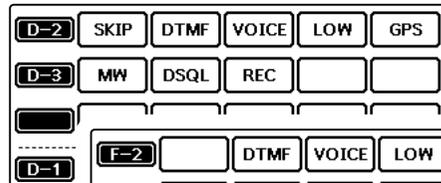


In the VFO mode (Operating Mode: DV)

Operating mode selection: S

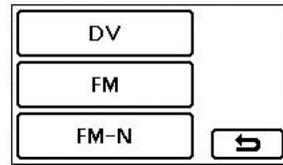



“kHz” tuning selection: S

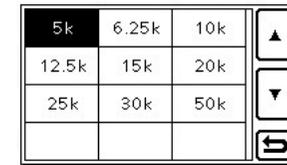

Sets MAIN band to the right side: S

Dual or Single band display selection: L

- In the Single band, touch [B] to set the B band as the MAIN band.

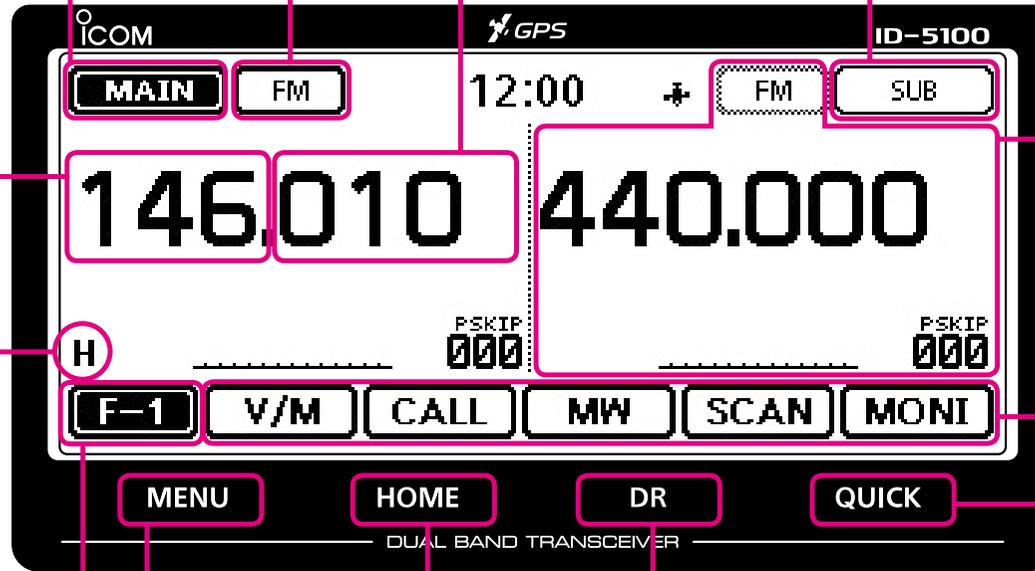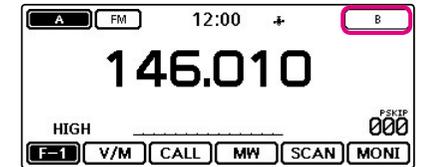

Sets MAIN band to the right side: S

- Touch operation on the SUB band is enabled when “Touch Operation (Sub)” is set to “Function Select” in the Menu screen.

Function menu operations


- The following operations are examples.

- MW** Displays the Memory Write window: S
Writes to a blank CH: L
- SCAN** Scan type selection: S
Starts a scan: L

Displays the QUICK Menu: S

- Mutes the audio: L

Displays the Menu screen: S

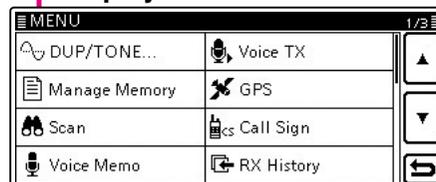

Home CH selection: S

- Selects the Home CH that you set in the QUICK menu.

Home CH setting: L

Displays the DR screen: S

- D-STAR settings can easily be made.

